

MOBILE FITNESS UNIT


-TECHNICAL SPECIFICATIONS-

Tricon IV: 6.5' x 8' x 8' ISO standardized shipping container with dual cargo doors on all 4 sides. ISO tested & CSC approved by Lloyd's Register for use in the 20' module configuration.

Features:

- Exterior Material - Continuously welded steel with horizontal corrugations. Heavy duty steel floor.
- Interior/Equipment Material - 3/16" thick, powder-coated steel squat racks & pull-up bars
- All CORTEN steel monocoque construction with 4-way forklift pockets
- Full-width access doors on opposite sides of container
- 26-2,000 lb rated lashing points
- 8-4,000 lbs. cap. interior wall & floor tie-down lashing points
- 12 Secure cam-action door-locks & vents, (8) 2 each cargo door
- EPDM Rubber, weather-proofing cargo door gaskets

(3) Tricon IV containers coupled together to form (1) 20' ISO module

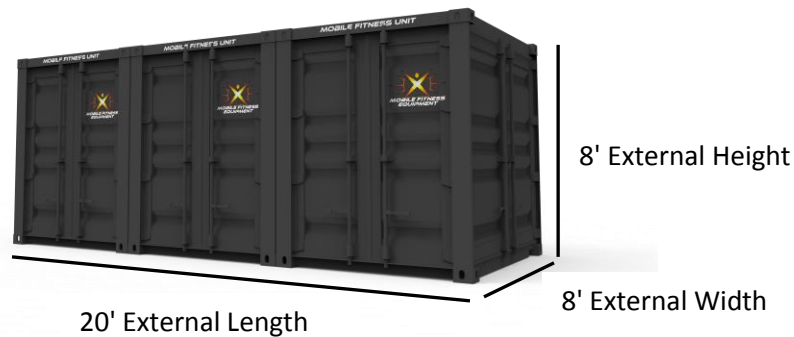

Container Dimensions:

1 Single Tricon IV Mobile Fitness Unit (MFU): Dimensions are uniform for all MFU options (100T, 200T, 300T)

External Length	2,438 mm	96"
External Width (short)	1,968 mm	77.5"
External Height	2,438 mm	96"
Internal Length	2,299 mm	90.5"
Internal Width	1,882 mm	74.06"
Internal Height	2,262 mm	89.06"
Door Opening Width	1,874 mm	73.75"
Door Opening Height	2,164 mm	85.187"
Maximum Gross Weight	6,759 kg	14,900 lbs
Tare Weight	1,134 kg	2,500 lbs
Payload Weight	5,625 kg	12,400 lbs
Internal Volume	9.9 cu.m	346 cu.ft
Fork Pocket Height	118 mm	4.65"
Fork Pocket Width	356 mm	14.02"
Fork Pocket Centers	902 mm	35.5"